
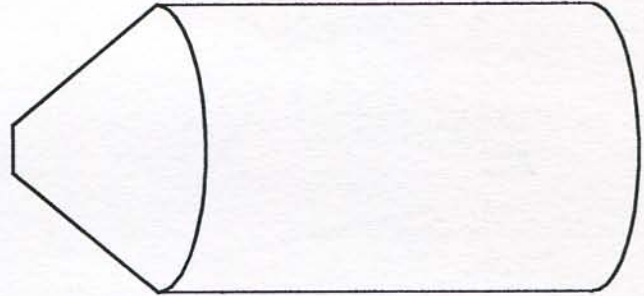


Pigs

Unlimited, Inc.

Bare Foam Pigs

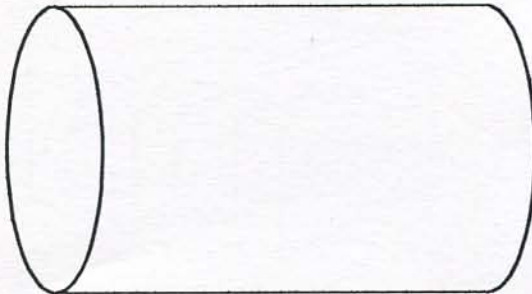

LB

| SIZE | LENGTH | WEIGHT | VOLUME |
|------|--------|--------|--------|
| 2" | 4" | 0.02 | 0.01 |
| 3" | 5" | 0.05 | 0.03 |
| 4" | 7" | 0.10 | 0.05 |
| 6" | 9" | 0.50 | 0.20 |
| 8" | 12" | 1 | 0.50 |
| 10" | 15" | 2 | 1.00 |
| 12" | 18" | 3 | 1.50 |
| 14" | 21" | 5 | 2.50 |
| 16" | 24" | 7 | 3.50 |
| 18" | 27" | 9 | 5.00 |
| 20" | 30" | 11 | 7.00 |
| 22" | 33" | 12 | 10.00 |
| 24" | 36" | 15 | 12.00 |
| 26" | 39" | 20 | 16.00 |
| 28" | 42" | 25 | 19.00 |
| 30" | 45" | 30 | 24.00 |
| 32" | 48" | 35 | 29.00 |
| 34" | 51" | 40 | 35.00 |
| 36" | 54" | 45 | 40.00 |
| 38" | 57" | 55 | 47.00 |
| 40" | 60" | 65 | 55.00 |
| 42" | 63" | 75 | 64.00 |
| 44" | 66" | 85 | 74.00 |
| 46" | 69" | 95 | 85.00 |
| 48" | 72" | 115 | 96.00 |

MB • HB

| SIZE | LENGTH | WEIGHT | VOLUME |
|------|--------|--------|--------|
| 2" | 4" | 0.05 | 0.01 |
| 3" | 6" | 0.15 | 0.03 |
| 4" | 8" | 0.50 | 0.05 |
| 6" | 12" | 1.25 | 0.25 |
| 8" | 16" | 2.50 | 0.75 |
| 10" | 20" | 5 | 1.00 |
| 12" | 24" | 8 | 2.00 |
| 14" | 28" | 12 | 3.00 |
| 16" | 32" | 20 | 5.00 |
| 18" | 36" | 25 | 7.00 |
| 20" | 40" | 30 | 9.00 |
| 22" | 44" | 40 | 12.00 |
| 24" | 48" | 50 | 16.00 |
| 26" | 52" | 65 | 20.00 |
| 28" | 56" | 80 | 25.00 |
| 30" | 60" | 110 | 31.00 |
| 32" | 64" | 130 | 38.00 |
| 34" | 68" | 150 | 45.00 |
| 36" | 72" | 175 | 54.00 |
| 38" | 76" | 205 | 64.00 |
| 40" | 80" | 250 | 74.00 |
| 42" | 84" | 275 | 86.00 |
| 44" | 88" | 300 | 99.00 |
| 46" | 92" | 340 | 112.00 |
| 48" | 96" | 375 | 128.00 |

Specifications

Cylinder with flat ends (model LB) and bullet-shaped cylinder with dished end (models MB, HB). Constructed from open-cell polyurethane foam with a high-grade abrasion and chemical resistant polyurethane elastomer coating on rear.

Applications

Used for drying and sweeping of loose debris, gauging of internal pipe conditions before extensive pigging, sealing behind stuck pig, batching operations, and product removal in the oil and gas, municipality, mining, food and beverage, chemical and petrochemical, cosmetic and pharmaceutical, and other various processing industries.

Options

2 pound (model LB), 5 - 7 pound (model MB), and 8 - 10 pound (model HB) foam density; double dish; double nose; pulling rope or cable; transmitter or pinger cavity; magnets; customized diameters and lengths for special pigging applications.