
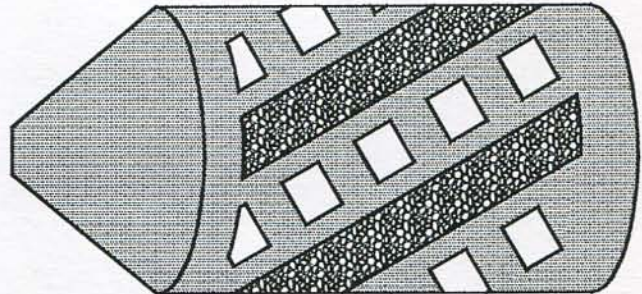


Pigs

Unlimited, Inc.

Silicon Carbide Foam Pigs

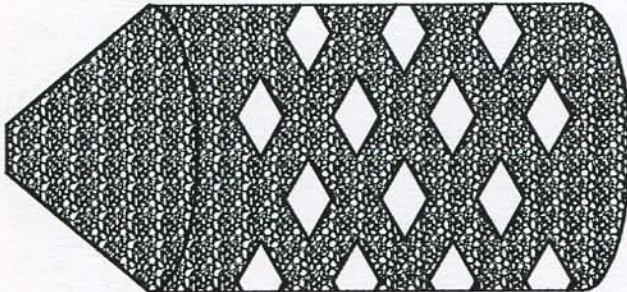

LS • MS

SIZE	LENGTH	WEIGHT	VOLUME
2"	4"	0.07	0.01
3"	6"	0.25	0.03
4"	8"	0.50	0.05
6"	12"	2	0.25
8"	16"	4	0.75
10"	20"	8	1.00
12"	24"	13	2.00
14"	28"	20	3.00
16"	32"	30	5.00
18"	36"	40	7.00
20"	40"	50	9.00
22"	44"	65	12.00
24"	48"	85	16.00
26"	52"	110	20.00
28"	56"	135	25.00
30"	60"	165	31.00
32"	64"	200	38.00
34"	68"	230	45.00
36"	72"	265	54.00
38"	76"	325	64.00
40"	80"	385	74.00
42"	84"	445	86.00
44"	88"	510	99.00
46"	92"	595	112.00
48"	96"	675	128.00

HS

SIZE	LENGTH	WEIGHT	VOLUME
2"	4"	0.07	0.01
3"	6"	0.25	0.03
4"	8"	0.50	0.05
6"	12"	2	0.25
8"	16"	4	0.75
10"	20"	8	1.00
12"	24"	13	2.00
14"	28"	20	3.00
16"	32"	30	5.00
18"	36"	40	7.00
20"	40"	50	9.00
22"	44"	65	12.00
24"	48"	85	16.00
26"	52"	110	20.00
28"	56"	135	25.00
30"	60"	165	31.00
32"	64"	200	38.00
34"	68"	230	45.00
36"	72"	265	54.00
38"	76"	325	64.00
40"	80"	385	74.00
42"	84"	445	86.00
44"	88"	510	99.00
46"	92"	595	112.00
48"	96"	675	128.00

Specifications

Bullet-shaped cylinder with dished end, constructed from open-cell polyurethane foam with a high-grade abrasion and chemical resistant polyurethane elastomer coating and abrasive silicon carbide applied with loose grit or bonded strap in single-spiral or double-spiral design.

Applications

Used for light, regular and heavy-duty scraping and cleaning of lines in the oil and gas, municipality, mining, food and beverage, chemical and petrochemical, cosmetic and pharmaceutical, and other various processing industries.

Options

2 pound (model LS), 5 - 7 pound (model MS), and 8 - 10 pound (model HS) foam density; totally coated; varying coating patterns; loose silicon carbide grit or bonded straps; double dish; double nose; pulling rope or cable; transmitter or pinger cavity; magnets; customized diameters and lengths for special pigging applications.